

SEMICONSOFT, INC.
Semiconductor Metrology Company



Absolutely no hardware or Operating system lock. Combine data from different sources; model them together or separately. Use your preferred measurement hardware and operating system.

Measurement Data Import Formats

TFC Companion software supports data imports in wide range of commonly used formats.

Following formats are currently supported:

- ✓ Sopra/KLA-Tencor
- ✓ Rudolph Technologies
- ✓ Filmetrics
- ✓ J.A.Woollam/Nanometrics
- ✓ Beaglehole Instruments
- ✓ Jobin-Yvon/Horiba
- ✓ Nanofilm
- ✓ TFC Companion format
- ✓ Excel (free form format)

Software automatically recognizes data format. If your data has a different format that is not currently supported – you can either convert data in TFC Companion format or put data in Excel spreadsheet for import.

TFC Companion provides a very easy and flexible text format that supports both ellipsometry and reflectance/transmittance data. Data can be comma or space separated. Several measurements e.g. Reflectance& transmittance, can be concatenated in the same file.

Following example shows TFC Companion formatted Reflectance data with comma separator:

TFC_DATA

[header fields below are options, lines with square brackets are ignored during parsing

this is a comment

#Date:Nov 9, 2008 11:03:09 AM

#Location:0.0,0.0

#WaferId:optional

#WaferLot: optional

#User: optional

[end of the optional header lines

Wavelength:Angle:Reflectance

nm

450.0, 0.0, 0.5424

451.0, 0.0, 0.5140

452.0, 0.0, 0.5213

SEMICONSOFT, INC.
Semiconductor Metrology Company

453.0, 0.0, 0.5176

Following is an example of ellipsometry data in TFC Companion format:

```
TFC_DATA
Wavelength:Angle:Delta:Psi
nm
300.0 70.00 218.964164 30.440233
305.1 70.00 225.675266 30.215575
310.1 70.00 231.483786 30.324429
315.2 70.00 236.645279 30.681542
```

Following is an example of ellipsometry data with s.d. values:

```
TFC_DATA
# This is a comment for testing
# Date: April 12,2006
# Location:10,5
# WaferId:TestWafer
# WaferLot:1
# User: John
Wavelength:Angle:Delta:Psi:sd_Delta:sd_Psi
nm-deg
240.1 70.00 93.931937 21.774168 0.2 0.1
242.3 70.00 143.497753 31.700100 0.2 0.1
277.9 70.00 88.559312 40.880459 0.2 0.1
313.5 70.00 62.057384 47.162740 0.2 0.1
```

Importing data from Excel.

Importing data from Excel file (*.xls) allows additional flexibility. User can select rows and columns to import and assign value types and units. Importing sequence is shown on Fig. 1, 2.

SEMICONSOFT, INC.
Semiconductor Metrology Company

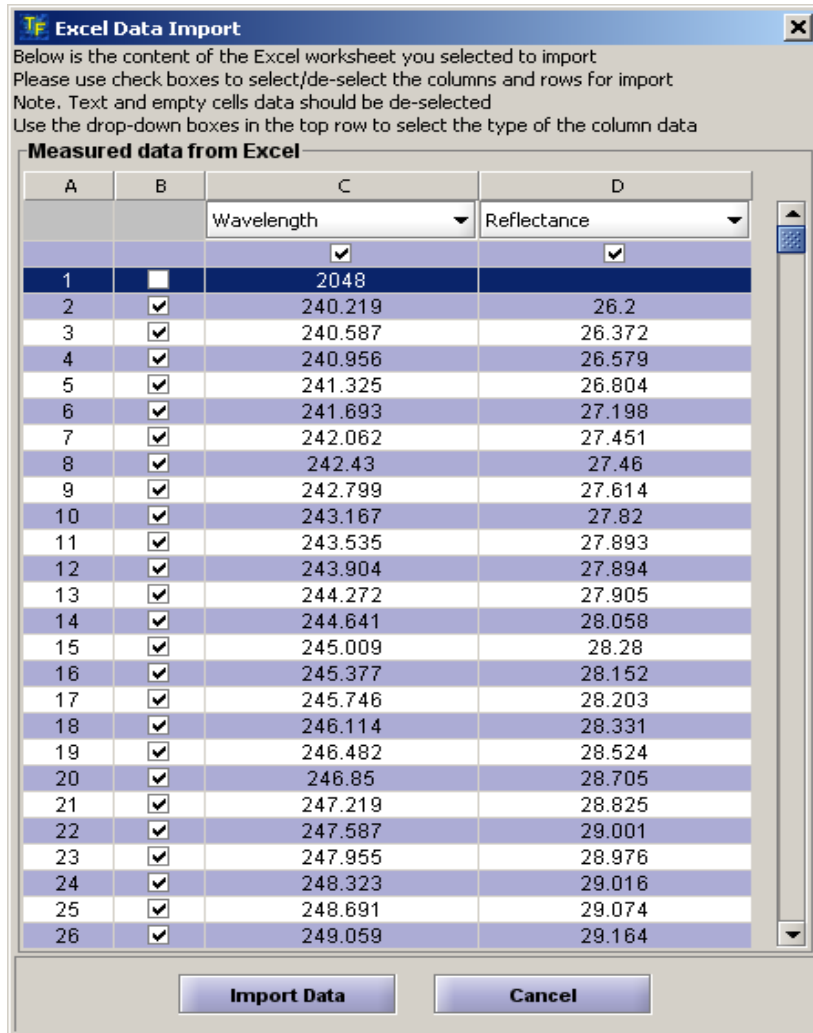


Fig. 1 Importing data from Excel. User selects rows and columns to import and assigns a type of the values.

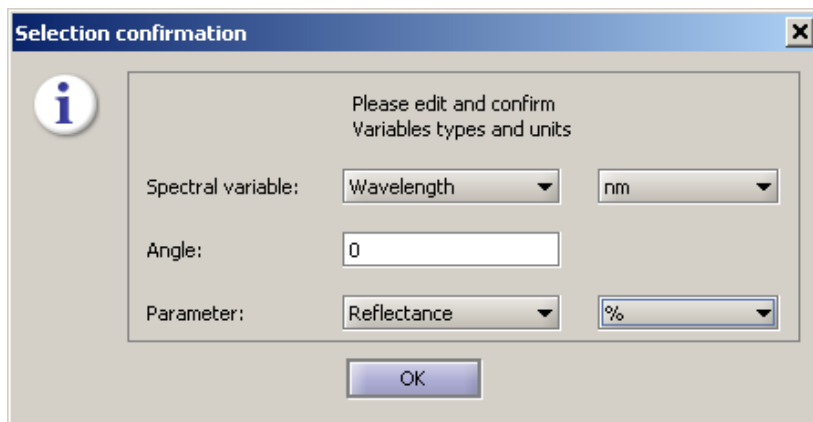


Fig. 2 Units and other additional information is selected during the import.